



General note: Contractor to remove and reinstall three existing blue ceiling mounted beacon lights in Room 109, 110 and 113. Lights require 120V power and two wall mounted switches. Exact location of lights and switches to be determined during construction.

SECURITY SYSTEMS LEGEND

- VSC □ IDS SITE COMMANDER
- PIR ○ IDS PASSIVE INFRARED MOTION DETECTOR
- DS □ IDS BALANCED MAGNETIC DOOR SWITCH
- VBM □ BADGE MANAGER
- CR □ ACCESS CARD READER
- CTV J □ JUNCTION BOX ABOVE CEILING FOR CCTV CONDUIT SYSTEM
- CTV J □ JUNCTION BOX FOR WALL MOUNTED CCTV CAMERA. MOUNT 8'-0" AFF.
- CTV J □ JUNCTION BOX ABOVE CEILING FOR CEILING MOUNTED CCTV CAMERA
- | — IDS SYSTEM CONDUIT WITH PULL STRING 3/4" UNLESS NOTED OTHERWISE
- CTV — EMPTY CONDUIT WITH PULL STRING FOR CLOSED CIRCUIT TV SYSTEM 3/4" UNLESS NOTED OTHERWISE

PROVIDE ROUGH-IN (POWER AND PATHWAYS) FOR GOVERNMENT FURNISHED SYSTEMS. PROVIDE PULL STRINGS IN ALL CONDUITS.

SECURITY SYSTEMS PLAN
 1
 E-104 1/8" = 1'-0"

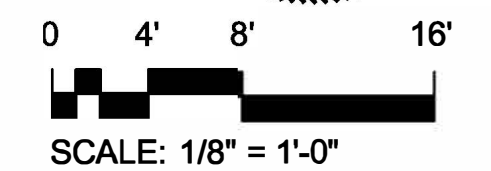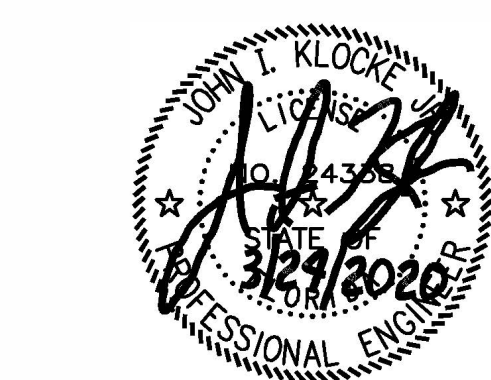

RENOVATE BLDG 90063, 505 CTS	DESCRIPTION	DATE	REV#
	Added General note	24 Jun 21	1
AIR FORCE SPECIAL OPERATIONS COMMAND		DATE:	3/24/2020
1 SPECIAL OPERATIONS CIVIL ENGINEER SQUADRON		DESIGNED BY:	JIK
HURLBURT FIELD, FLORIDA		DRAWN BY:	JPM
		BUILDING NUMBER:	90063
		PROJECT NUMBER:	CP1033059
		SHEET REFERENCE:	E-104
		SHEET NUMBER:	55 OF 59