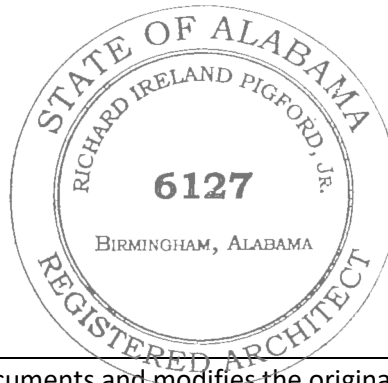


**ADDENDUM NUMBER TWO****Issued: 13 January 2023****Bid Date: 7 February 2023 at 2:00 PM**

This Addendum forms part of the Contract Documents and modifies the original Bid Documents dated July 30, 2021. Acknowledge receipt by inserting its number on the Bid Proposal Form. Failure to do so may subject Bidder to disqualification. Drawings and Specifications for the above project are hereby amended as follows:

**RESPONSES TO RFIs**

1. The bid form lists 1 alternate; Furniture Package. However, sheet C200 shows the Field House as an Alternate. Please clarify which is correct.

*Response: The only Alternate for this package is for the Furniture Package as listed on the bid form. The reference to the Field House as an alternate is incorrect as the Field Shed is in the base bid. Disregard this reference.*

2. Is this project exempt from local and state sales tax?

*Response: Yes, this project is sales tax exempt. Forms are included for the bid in Division 00, page 67, "Accounting of Sale Tax, Attachment to ABC Form C-3, Proposal Form".*

3. The fence detail referenced on 3/AW310 cannot be found. Please specify product.

*Response: Specified product is in the project manual, Section 32 3136 – Security Gates and Barriers. Additional information is located on sheet A100 of the Site & Civil Package.*

4. Sheet AG600, Finish Schedule, lists WD-1 for floor finish, but that material is not specified. It appears to be tongue and groove boards per detail 5/AG500, but the specification section 06 1500 does not call out tongue and groove. Please clarify which product is to be used.

*Response: WD-1 refers to materials and installation per Section 06 1500 – Wood Decking. This decking is shown incorrectly as tongue & groove on detail 5/AG500. Exterior wood decking shall comply with Section 06 1500.*

5. Please confirm the windows and doors for this project are not required to have impact resistance glass and withstand high velocity winds.

*Response: Doors and windows **will be required** to have impact resistant glazing and withstand high velocity winds.*

6. There is a specification section for countertops, and it contains 3 different types of materials, however, the plans do not state which product goes where. Please clarify.

*Response: The (3) listed countertop types shall be utilized as follows:*

*Wood Countertops – in Workspace S101 in the Maintenance Shed Package*

*Stainless Steel Countertops – countertops at the Farm Harvest Classroom G103 in the Gathering Hub Package*

*Natural Quartz and Resin Composite Countertops – to be used at wall restroom vanities and countertops in the Welcome Hub, Mobility Hub, and Maker Hub Packages*

**DRAWINGS – NO CHANGES**

**SPECIFICATIONS – NO CHANGES**

**END OF ADDENDUM NO. 2**